




Part 01 / Roots Blower

Part 02 / Microporous nano aeration tube

Part 03 / Accessories

Part 04 / **Connection instance**

Part 05 / Geomembrane

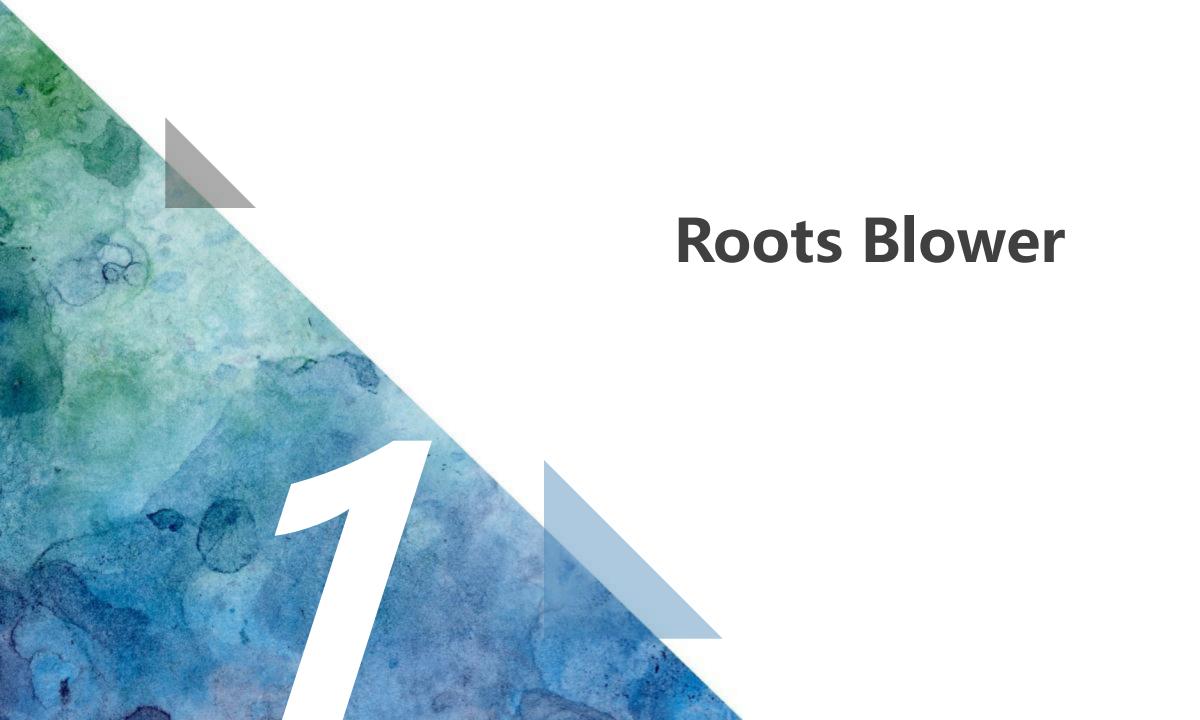



2"-12" roots blower



1HP-50HP diesel engine




1HP-50HP motor









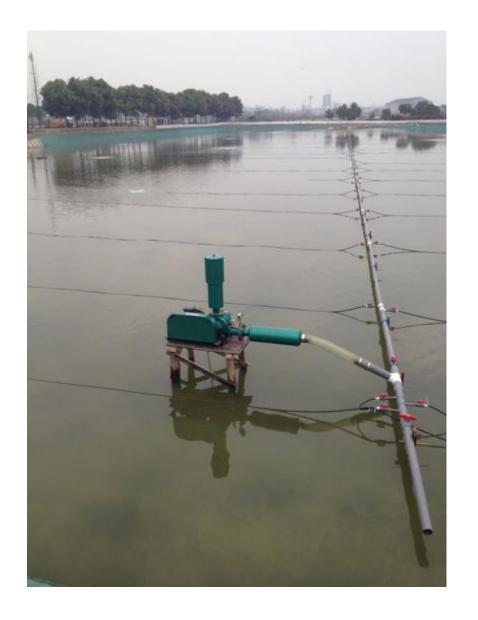













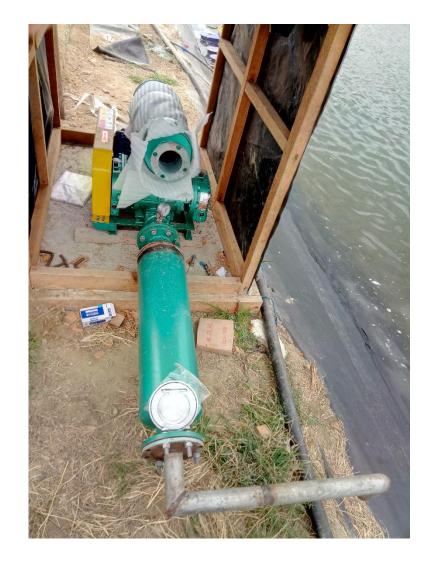





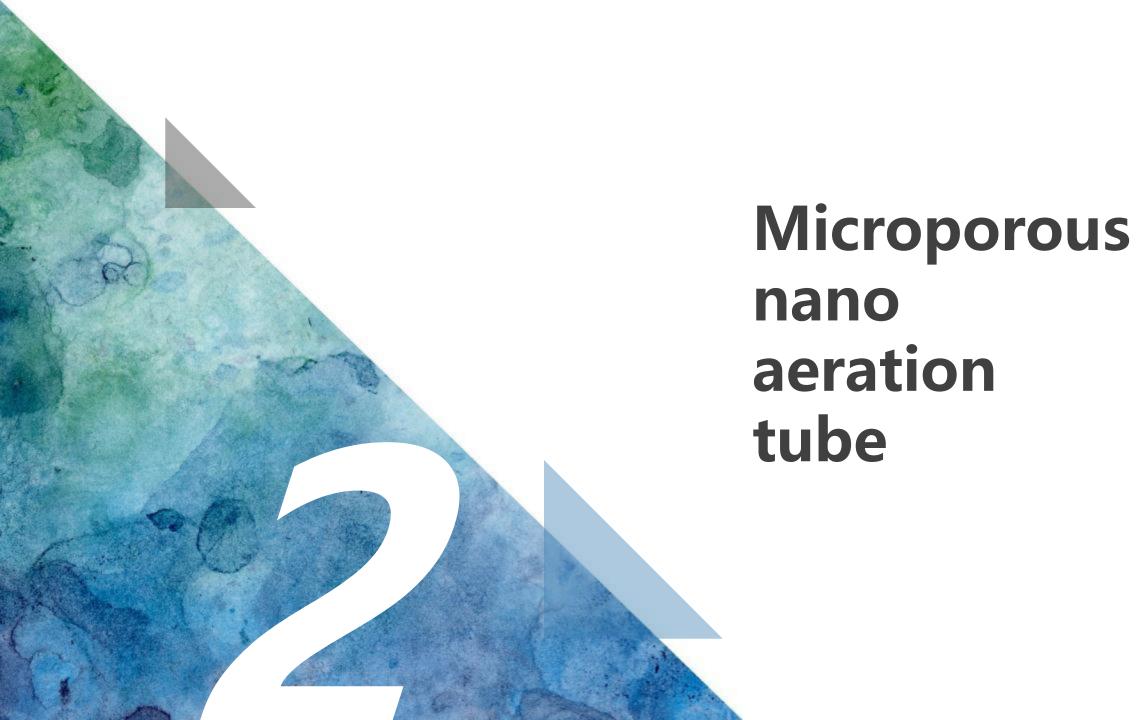



10mm*16mm



10mm*16mm 200M/Roll 21kg



12mm*25mm





Outer Diameter: 16±1mm/25±1mm Inner Diameter: 10±1mm/12±1mm

Micro hole Average diameter: $\phi 0.03-\phi 0.06$ mm

Bubble Density: 700-1200pcs/meter

Bubble Diameter: 0.5~2mm (fresh water), 0.8~3mm (salt water)

Oxygen Transfer: 0.002~0.006 m3/m·min

Air Flow: 0.1~0.4 m3/m·h

Cover Area: 1-8 m2/m

Applicable Water Depth: $1\sim1.5$ meters Applicable Pressure Range: $10\sim80$ kpa

Power per KW: suitable for 150 ~ 200m diffuser tube

Packing: 200 m/roll and 100 m/roll













¢ 11.5mm

¢ 11.5mm

12mm-20mm

12mm-20mm

12mm











PVC 50mm to 20mm

PVC 50mm to 20mm

PVC 20mm ball valve

U-PVC 50mm Equal Diameter Three Links

PVC 20mm ball valve











Three links 14mm 12*25

PVC 50mm right angle bend

Three links 18mm 16*25

Three links 18mm 16*25

PVC 50mm to 20mm With pagoda head








PVC 40mm to 20mm

¢ 14mm

PVC 50mm to 20mm



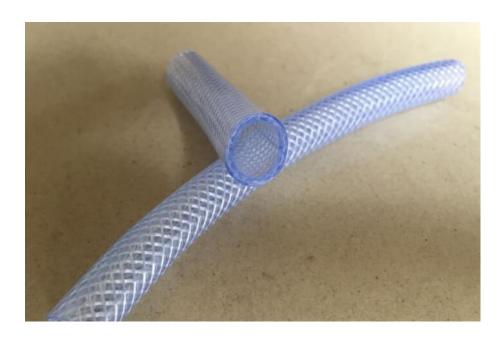

Link pipe, High pressure, textured hose, inner diameter 9.5mm



100m/roll













